


POLYURETHANE HOSE - FLAT

Since 1990

FLEXAFLEX

Flexadux P7 L PU AE Flat - Food Grade

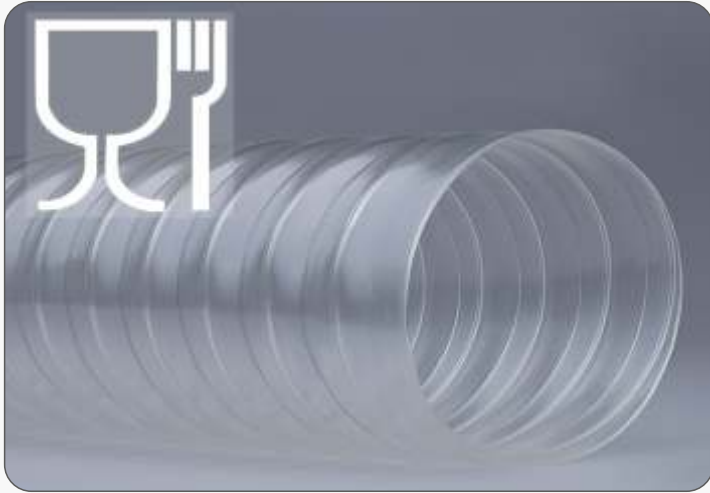

Structure:

Flat Polyurethane hose without wire reinforcement - Food Grade

Material

Polyether - Polyurethane - Clear

Properties:

Resistant to hydrolysis and microbes, non toxic, food proved according to FDA and EU regulations, smooth bore, good flexibility, excellent abrasion resistance, vibration proof, resistant to oil and petrols, free of halogen and softeners

Applications:

Transport of abrasive solids in conveying, feeding and screening equipments (eg. Sieving Machines)

Temperature range:

-40° C up to +100 ° C

Std Length

5 and 10 meter

Specials:

P7 L PU AS Flat: antistatic ($R \leq 10^8 \text{ Ohm}$), conform to TRBS 2153

P7 N PU AE Flat: reinforced version (material thickness: 1.4 mm)

		
int mm	mm	kg/m
50	0.7	0.23
80	0.7	0.36
100	0.7	0.39
120	0.7	0.43
125	0.7	0.45
140	0.7	0.50
150	0.7	0.54
160	0.7	0.57
175	0.7	0.62
180	0.7	0.64
200	0.7	0.71
225	0.7	0.80
250	0.7	0.89
275	0.7	0.98
300	0.7	1.07
350	0.7	1.24
400	0.7	1.42
450	0.7	1.59

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table.

In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you.

Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhoses@be@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in +91-94 897 38 415

FLEXAFLEX HOSES INDUSTRIES
51, Dr. NANJAPPA ROAD
COIMBATORE - 641 018